



Connect your Network with Style



Traditional switches are not designed to be installed in a living room, bedroom, or office desk, so usually we hide them because the design is not user-friendly – they have flashing LED lights and a bunch of cables that we don't want to see.

NETGEAR tackles this problem head-on with the industry's first consumer-friendly switch with integrated cable management. The 900 Series switches are the first switch that you want to display!

Thanks to the stylish design and the built-in cable organizer, you will keep your office and home neat and tidy. Moreover the LED ON/OFF button will keep your environment quiet so no light will disturb your movie, work or sleep.

Key Highlights



Integrated Cable Management

Keeps your office and home neat and tidy, with organized cables.



Silent and Invisible

Innovative, fanless design with an on/off LED light button.




USB charging ports *

Conveniently placed to allow you to charge your smartphone and tablet



Easy to use web interface*

Intuitive and simple, with rich and advanced functions.

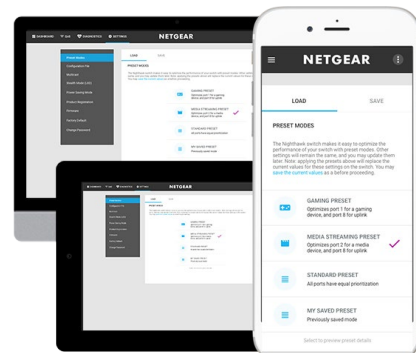

Hardware at a Glance


MODEL NAME	FORM-FACTOR	GIGABIT COPPER PORTS	POWER & PORT LED	LEDs	USB CHARGING PORTS	AUTO-DIAGNOSTICS LED	FANS
GS908	Desktop/Wallmount	8	Yes	Power, Port Link/Speed/Activity	Not applicable	No	0 (silent)
GS908E	Desktop/Wallmount	8	Yes	Power, Port Link/Speed/Activity	2-port 10W maximum per port 20W maximum total	Yes	0 (silent)

Software at a Glance

MODEL NAME	MANAGEMENT	VLANS	IGMP SNOOPING	IEEE (802.3AZ) AUTO-EEE	QoS	PORT TRUNKING	JUMBO FRAME SUPPORT
GS908	Unmanaged	No	N/A	Yes	Yes	N/A	Yes
GS908E	Smart Managed Plus	Port-Based/ 802.1Q	IGMP Multicast Snooping	Yes	Port-Based/ IEEE 802.1p	Yes	Yes

Example Application

GS908 in a Home Environment

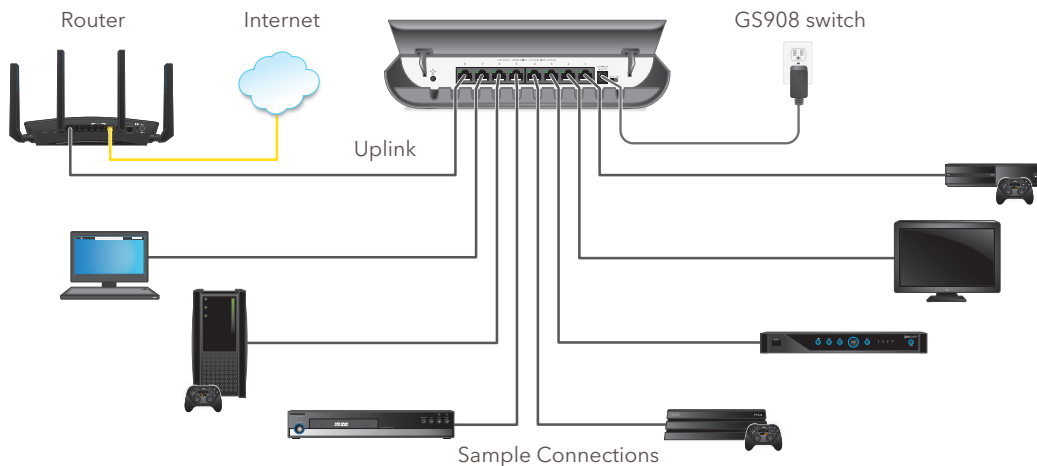

Why the 900 Series switches are ideal for Home and Business Users



Plug-and-play: Automatic connectivity to your router or modem of 7 additional wired connections. No need for an IT expert!

Sleek and Stylish Design: The round shape and slim design will match any decor, and our lightweight housing allows the switch to be mounted anywhere

Integrated Cable Management: Clean up your network with style – No more messy cables! Our integrated cable management will keep your office and home neat & tidy with no more tangled cables causing an unsightly mess.

Silent and invisible: Don't allow a blinking light to disturb your movie, work or sleep. Just push the LED ON/OFF button and any flashing lights will be turned off; also the fanless design keeps the switch silent.

Technical Specifications

PRODUCT	GS908	GS908E
		
1G RJ-45 ports	8	8
USB Charging Ports	N/A	2-port 10W maximum per port 20W maximum total
LED ON/OFF Button	Yes	Yes
PERFORMANCE SPECIFICATIONS		
Bandwidth	16 Gbps	
Priority queues	4	
Priority queuing	Weighted Round Robin (WRR)	
MAC Address database size (48-bit MAC addresses)	4K	
Multicast groups	128	
Packet forwarding rate (64 byte packet size)	11.9 Mfps	
Speed/Latency	10Mbps:<76.9µs 100Mbps:<9.1µs 1000Mbps:<2.7µs	
Jumbo frame support	Up to 9K packet size	
Acoustic noise level @ 25°C	0	
POWER/ENERGY EFFICIENCY		
Auto Power Down	Yes	
Short Cable Detection/Power Saving	Yes	
Max power (worst case, all ports used, line-rate traffic)	3.1W maximum	3.3W maximum (no USB charging) 26.3W maximum (with USB charging)
QUALITY OF SERVICE (QoS)		
Port-based rate limiting	N/A	Ingress and egress
Port-based QoS	N/A	Yes
IEEE 802.1p COS	Yes	Yes
IPv4 DSCP	Yes	Yes
Port Rate Limiting Rates	N/A	512 kbit/s 1/2/5/8/16/32/64/128/256/512 Mbit/s
Pre-Defined Priority Queues	N/A	Critical/High/Medium/Low
Weighted Round Robin (WRR)	Yes	Yes
Strict priority queue technology	N/A	No
Multiple Language GUI	Product documentation and user interfaces are translated, giving you the ability to select your preferred language	

Technical Specifications

PRODUCT	GS908	GS908E
VLANS		
VLAN (# Supported)	N/A	64
Port-based VLAN	N/A	Yes
IEEE 802.1Q VLAN Tagging	N/A	Yes
L2 SERVICES - MULTICAST FILTERING		
IGMP snooping (v1, v2, and v3)	N/A	Yes
IGMP snooping querier	N/A	No
Block unknown multicast	N/A	Yes
Static multicast router port	N/A	Yes
L3 SERVICES - DHCP		
DHCP client	N/A	Yes
LINK AGGREGATION		
Static Manual LAGs (Port Trunking)	N/A	Yes
# of Static LAGs / # of members in each LAG	N/A	2 LAGs with maximum 4 members in each LAG
LEDS		
Per port	Speed, Link, Activity	
Per device	Power	Power (Blue), Auto-Diagnostics (Amber)
PHYSICAL SPECIFICATIONS		
Dimensions (W x D x H)	234 x 164 x 33mm (9.22 x 6.46 x 1.29in)	
Weight	0.37kg (0.81lb)	
POWER CONSUMPTION		
Power Supply	AC Power Adapter, 100-240VAC, 50-60Hz Adapter is localized to country of sale	
Max power (worst case, all ports used, line-rate traffic)	3.1W maximum	3.3W maximum (no USB charging) 26.3W maximum (with USB charging)
Min power (link-down standby)	1.5W minimum	1.6W minimum (no USB charging)
Heat Dissipation (max and min)	5.1 BTU/hr minimum 10.4 BTU/hr maximum	5.4 BTU/hr minimum (no USB charging) 89.8 BTU/hr maximum (with USB charging)
Fan(s)	Fanless	
ENVIRONMENTAL SPECIFICATIONS		
Operating		
Operating temperature	0° to 40°C (32° to 104°F)	
Humidity	90% maximum relative humidity (RH), non-condensing	
Altitude	10,000 ft (3,000 m) maximum	
Storage		
Storage temperature	-20° to 70°C (-4° to 158°F)	
Humidity	95% maximum relative humidity (RH), non-condensing	
Altitude	10,000 ft (3,000 m) maximum	

Technical Specifications

REGULATORY COMPLIANCE	
	FCC, ISED, CB, CE, RCM, VCCI, and BSMI CCC. (GS908 only) KC (GS908E only) EMC Class B
WARRANTY AND SUPPORT	
Hardware warranty*	3 year warranty 90-day complimentary technical support following purchase from a NETGEAR authorized reseller
ProSUPPORT OnCall 24x7, Service Plans	Category S01: PMB0S11 (1 yr) PMB0S31 (3 yr) PMB0S51 (5 yr)

Ordering Information

PACKAGE CONTENT	
All Models	GS908 or GS908E Gigabit Ethernet Switch
	Cable retention strap
	Wallmount kit
	AC power adapter
	Installation guide
ORDERING INFORMATION	
GS908-100NAS	North America and Latin America
GS908-100PES	Europe
GS908-100UKS	United Kingdom
GS908-100JPS	Japan
GS908-100AUS	Australia and New Zealand
GS908-100PRS	China
GS908E-100NAS	North America and Latin America
GS908E-100PES	Europe
GS908E-100UKS	United Kingdom
GS908E-100JPS	Japan
GS908E-100AUS	Australia and New Zealand

*This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and covers unmodified hardware, fans and internal power supplies - not software or external power supplies, and requires product registration at <https://www.netgear.com/business/registration> within 90 days of purchase; see <https://www.netgear.com/about/warranty> for details. Intended for indoor use only.

**The NETGEAR OnCall 24x7 contract provides unlimited phone, chat and email technical support for your networking product.

¹Actual product may vary slightly from image.

[†]NETGEAR #1 in US Market Share according to NPD data for Unmanaged and Smart Switches, January 2019. NETGEAR #1 in Europe Market Share according to Context data for Unmanaged and Smart Switches, January 2019.

NETGEAR, the NETGEAR Logo, and NETGEAR Insight are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s).

NETGEAR, Inc. 350 E. Plumeria Drive, San Jose, CA 95134-1911 USA, 1-888-NETGEAR (638-4327), E-mail: info@NETGEAR.com, www.NETGEAR.com

DS-GS908/GS908E-14August19